

# SEALPOINT

&WPC &PVC &SPC &UV MARBLE



SEALPOINT

SHANDONG RUNTAI IMPORT AND EXPORT CO., LTD

Perfection is not attainable, but if we chase perfection we can catch excellence----Vince Lombardi

- Incredibly Strong
- Non-toxic
- Eco-friendly

# ABOUT US



SealPoint

is a comprehensive trading company engaged in the import and export of grille and ecological wood products.

Relying on Linyi Senning Ecological Wood, the manufacturer, the company was established in 2020, and focuses on producing innovative and eco-friendly building materials.

SealPoint's

products are distributed across China and used in various industries, including furniture.

## WHY CHOOSE US

NYI CITY FROM

SHANDONG PROVINCE,

WE ARE PROFESSIONAL FOR THIS WPC DECORATION MATERIALS, WE HAVE BEEN DOING THIS FOR MORE THAN 15 YEARS.

WE DEFINITELY WILL MAKE SURE THE QUANTITY OF THE GOODS ARE GOOD, BECAUSE WE HAVE A PROFESSIONAL QUALITY INSPECTION TEAM TO DO THE QUALITY CONTROL.

AND WE HAVE OUR OWN FACTORY TO PRODUCE, THE PRICE IS REASONABLE!

WE WILL MAKE SURE EVERYTHING IS RIGHT, WE WILL TRY OUR BEST TO SERVE YOU WELL. SHORT DELIVERY AS WE CAN, SAFETY PACKAGE, AFTER-SALES INSTALLATION AND USE GUIDANCE..

WE ARE LOOKING FOR A LONG-TERM COOPERATION RELATIONSHIP WITH YOU.


# WPC WALL PANEL



# WPC WALL PANEL



R200/9WPC

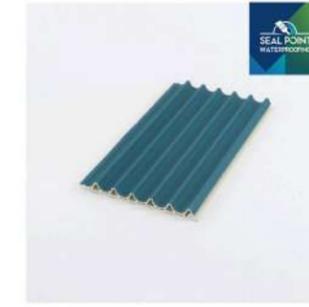

R150/16WPC  
Innerarc




R200/10WPC  
waveboard



R200/15WPC  
waveboard



R150/15WPC  
Smallsemicircle

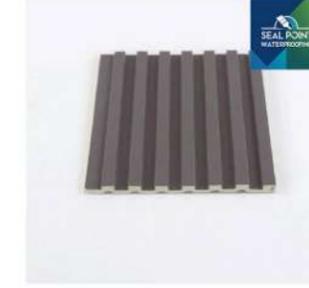

R150/8WPC  
Solidt rough




R50/45  
Square wood



R100/50  
Squarewood




R160/24WPC



R160/24WPC



R150/16WPC



R195/28WPC



R150/9WPC



R150/12WPC



R150/12WPC



R195/12WPC



R50/60 ceiling



R50/90 ceiling



R25  
Ceiling corner line



Ceiling  
cornerline

# BAMBOO CHARCOAL BOARD



PRODUCT NAME	BAMBOO CHARCOAL PVC WALL BOARD
MATERIAL	BAMBOO CHARCOAL AND PVC COMPOSITE CO-EXTRUSION
SIZE	1220*2440/2600/2800/3000MM
THICKNESS	5MM/8MM
COLOR	SOLID COLOR,CLOTH GRAIN,WOOD GRAIN,SKIN SENSE.....
SURFACE FINISH WAYS	CO-EXTRUSION,HOT PRESSING,ETC
WATER ABSORPTION	LESS THAN 1%,WATERPROOF
FLAME-RETARDANT LEVEL	B1 GRADE
APPLICATION	OFFICE,APARTMENT,PRIVATE HOUSE,HOTEL,HOSPITAL....
INSTALLATION	INTERLOCKING,FAST,EASY AND LOW INSTALLING COST
SERVICE LIFE	30 YEARS (INDOOR)
DELIVERY TIME	10-15 DAYS
SAMPLES	FREE



High Plasticity straight or curved




# 400+ COLOR selection


Design and color hundreds of ,follow custom your home.



## ACCESSORIES

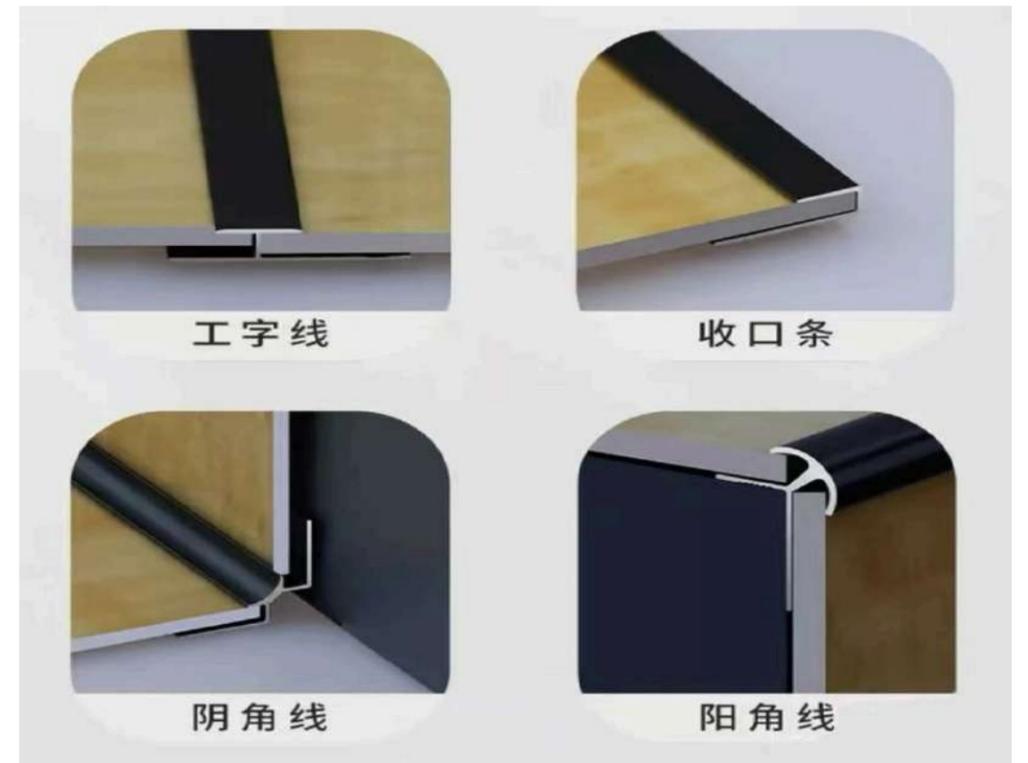

# EXTERIOR WPC DECKING

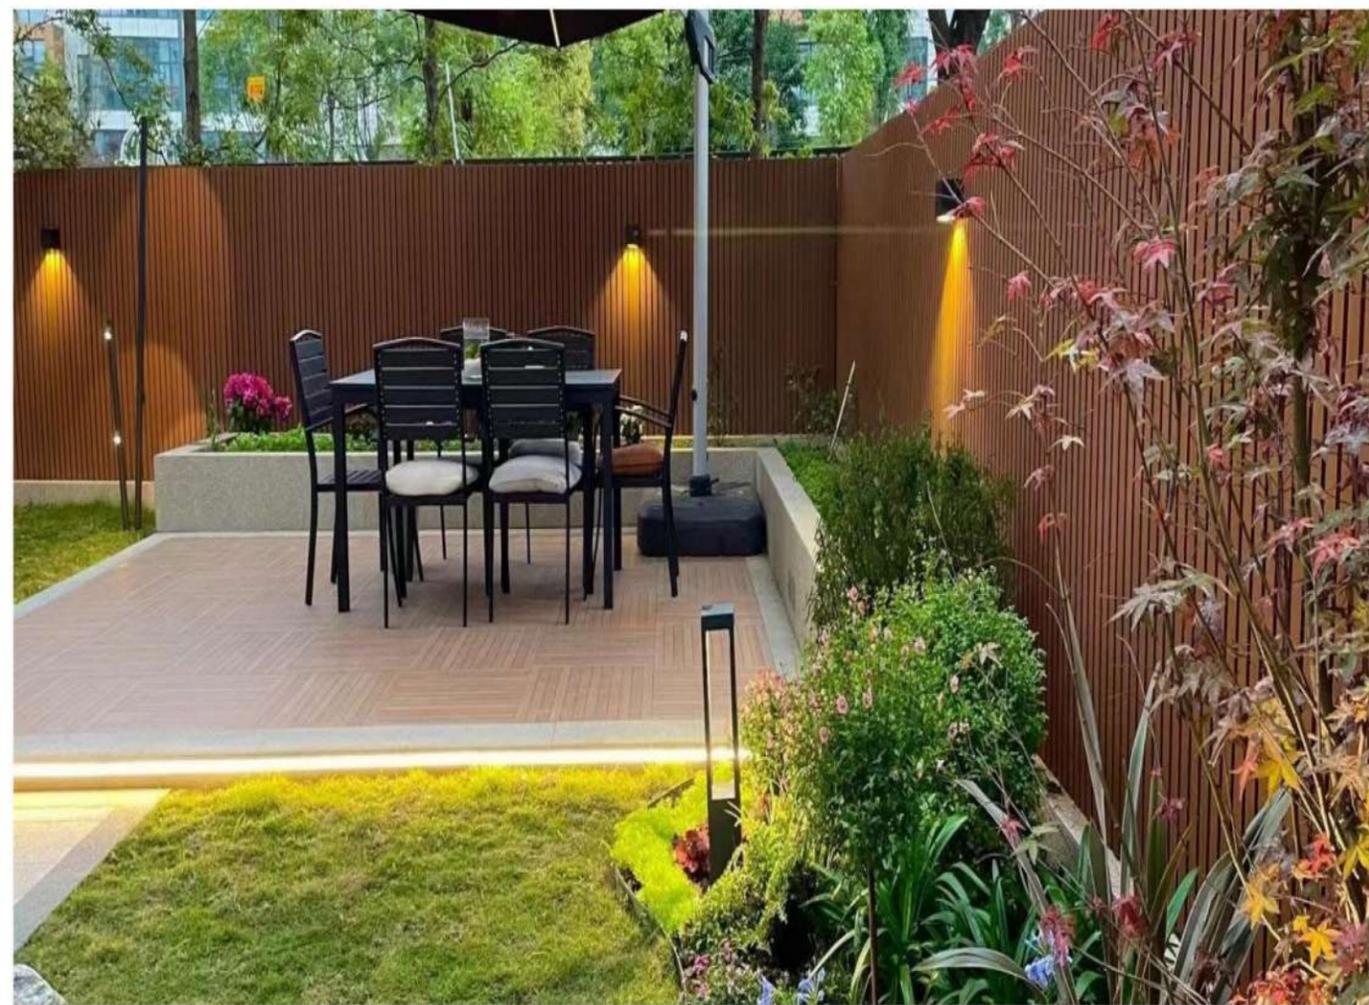

## Environmental Advantages

Wood plastic, also known as wood plastic, as the name suggests, is a combination of plant fiber and plastic, a material used to replace wood.

English name WPC (Wood-Plastic-Composites)

Plastic wood has natural wood grain and wood color. Low maintenance costs. Easy to install.

Resists termite and insect attack and will not split, rot or warp.

Weather resistant. High performance non-slip composite decking designed to with stand years of sun, rain, sleet and snow.



Square hole stripes 140-25



Six round hole stripes 140-25



Square hole relief 1470\*25



Round hole relief 140-25



second generation round hole



co-extrusion solid 140-25

# Co-extruded Decking

## What is co-extrusion ?

The co-extrusion process is an advanced plastic processing technology. It extrudes two or more different plastic materials through the same extruder so that they are mixed evenly at the extrusion port to form a new composite material. This process can complete multiple functions in one extrusion process, such as reinforcement, flame retardancy, wear resistance, corrosion resistance, etc., and has broad application prospects.

The development trend of co-extrusion molding process is towards high performance, high function and high added value. As people's requirements for environmental protection, energy saving, and safety increase, the co-extrusion molding process will be more widely used. At the same time, the co-extrusion molding process will also be combined with other processing technologies to form a more complex and efficient production process, providing better solutions for the production of plastic products.



Co-extruded outer layer

Plastic wood lining

# Color Card



石板灰/Slate gray



灰色/grey



枫木色/Maple



柚木色/Tea




紫檀色/Rosewood




红色/Red

# WPC Grille Plate

Wood-plastic Great Wall panels are mainly used for decoration of interior walls, exterior walls, fences, walls, indoor ceilings, partitions, etc. The main specification of the WPC Great Wall Board is 219\*26mm; of course, the WPC Great Wall Board inherits the excellent quality of the WPC composite material and has the characteristics of aging resistance, acid and alkali resistance, insect resistance, impact resistance, low carbon and environmental protection, and dirt resistance. Easy to clean, green and environmentally friendly product features.

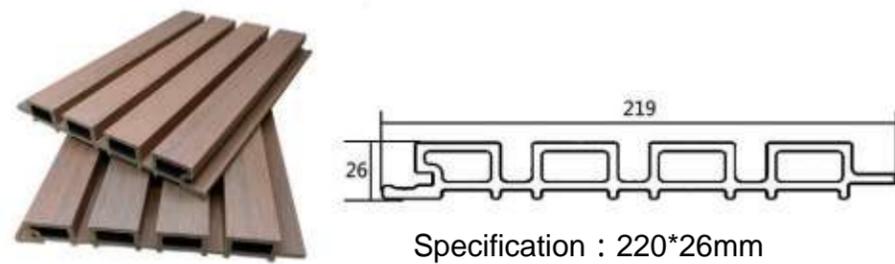

Due to the overlapping portion of this wall panel installation, the actual limited width is 200 mm(200mm=0.2m).  
For example, if your fence needs to be 10 meters long, then the quantity you need is 10 meters/0.2 meters = 50 pieces

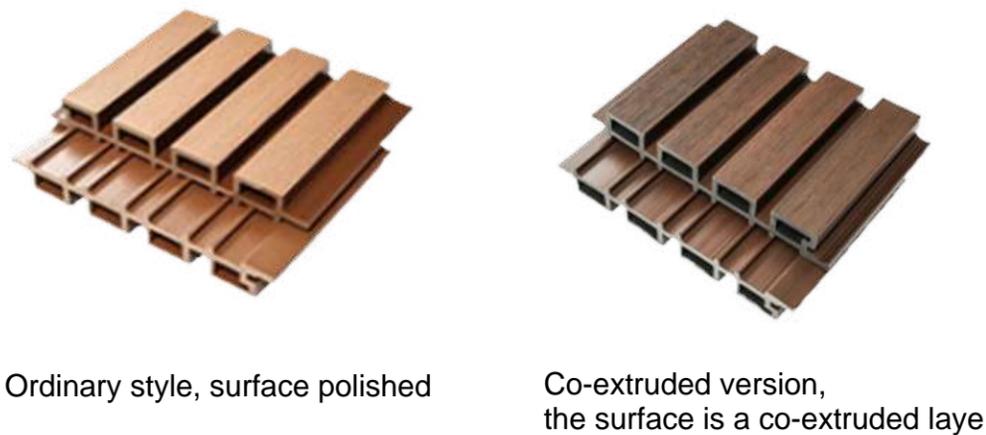

# Grille Plate Color



红木色/Red



柚木色/Teak

Ordinary



棕红色/Brown



深咖啡色/Coffee



灰色/Grey




黑色/Black

# WPC Grille Plate



# Wide Range Of Applications

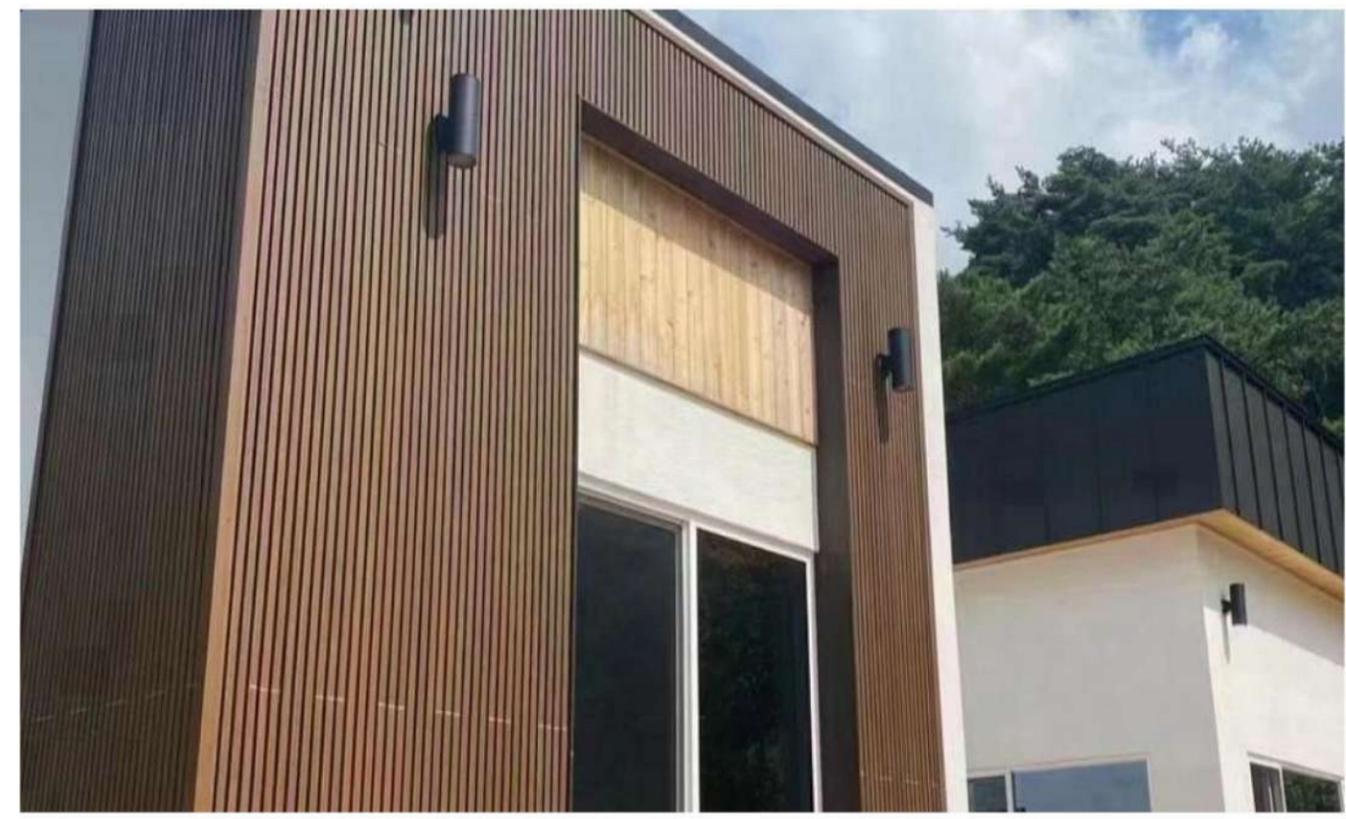

柚木色共挤  
Teak co-extrusion



枫木色共挤  
Maple co-extrusion



原木色共挤  
Burlywood co-extrusion



紫檀色共挤  
Rosewood co-extrusion



石板灰共挤  
Slate gray co-extrusion



黑色共挤  
Black co-extrusion



# Wall Panel

155-20 Plastic wood wall panels are moisture-proof, wear-resistant, and anti-corrosion, and are mainly used in outdoor projects, such as wooden houses, exterior walls, pet houses, etc.



Specification : 155\*20\*2900mm




3D wood grain wall panels



smooth flat wall panel



Various colors, support customization

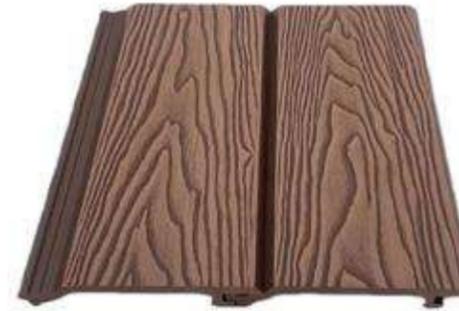

棕红色/Rosewood



柚木色/Teak



红木色/Red



黑色/Black



咖啡色/Coffee








浅灰色/Gre

# UV MARBLE SHEET

# Color Card

PRODUCT NAME	PVC UV MARBLE SHEET
MATERIAL	PVC,CALCIUM POWDER AND ADDITIVE
COPOSITION	PVC BASE BOARD,HOT STAMPING ,PVC FILM,UV-CURING PAINT..
COLOR	MARBLE,WOOD GRAIN,SOLID COLOR,GOLDEN VEIN,3D,CUSTOMIZED
FEATURE	ECO-FRIENDLY,FIRE RETARDANT,WATERPROOF,EASY TO INSTALL ..
SIZE(MM)	1220*2440/1220*2800/1200*2900
THICKNESS(MM)	2MM/2.5MM/2.8MM/3MM
PACKAGE	100PCS/PALLET OR CUSTOMIZED
INSTALLATION	GLUE ON THE WALL,ALUMINUM ALLOY DECORATIVE LINE
APPLICATION	INTERIOR WALL DECORATION,HOTEL,SUPERMARKET,KITCHEN....

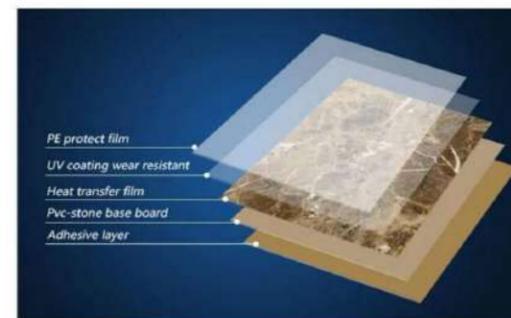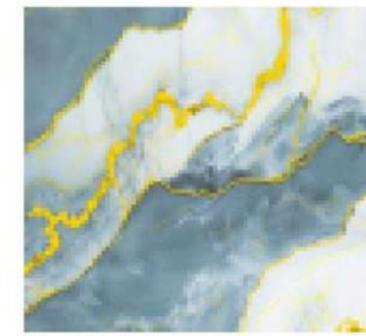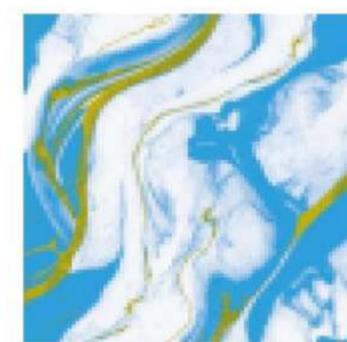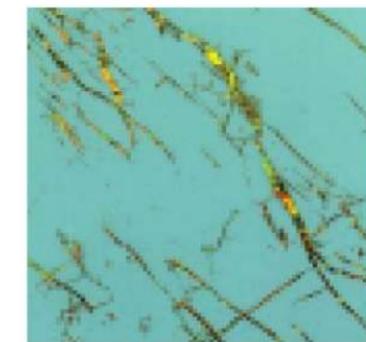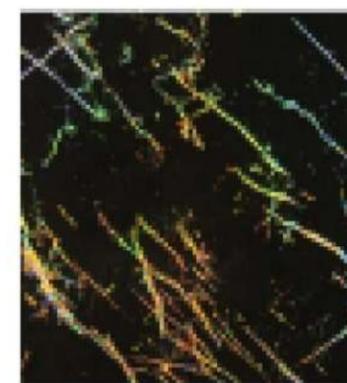

FORMALDEHYDE FREE



SOUND INSULATION



VARIETY OF DESIGNS




FLAME RETARDANT MATERIAL



MOISTURE-PROOF




THOUGHNESS

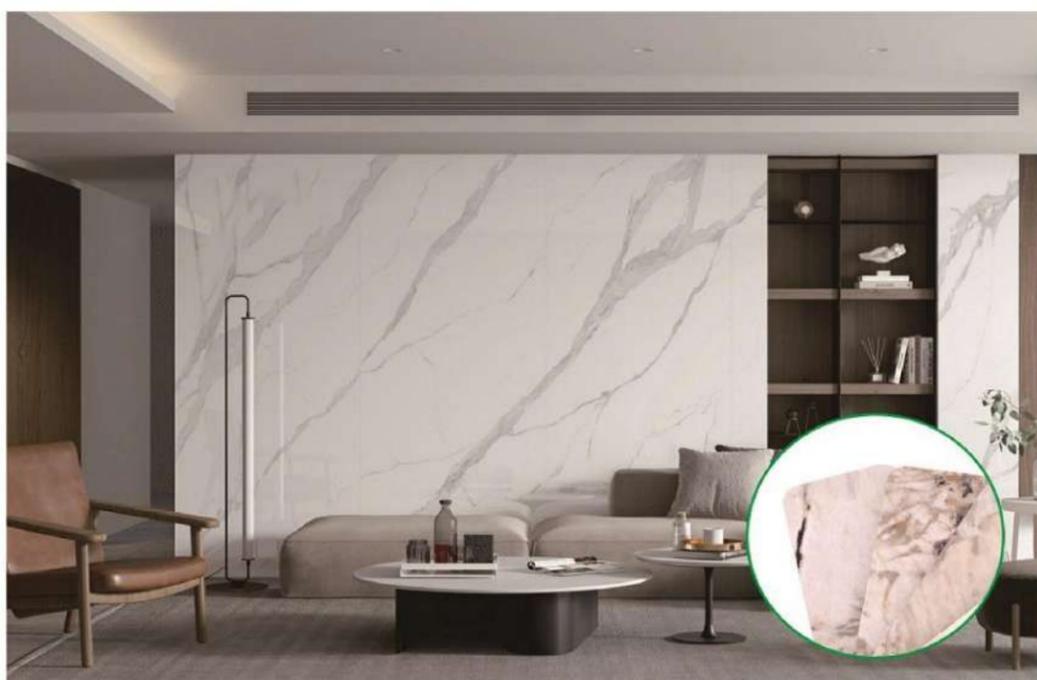

# SPC FLOORING

SPC flooring is a new type of flooring material invented in response to national emission reduction. The main raw material of SPC flooring, polyvinyl chloride resin, is an environmentally friendly and non-toxic renewable resource, 100% free of formaldehyde, lead, benzene, heavy metals and carcinogens, no radiation, real natural environmental protection.

SPC floor is also waterproof, fire-proof, anti-slip high flexibility, sound and noise-proof and high temperature ( 80 degrees ) low temperature (-20 degrees) and other characteristics.

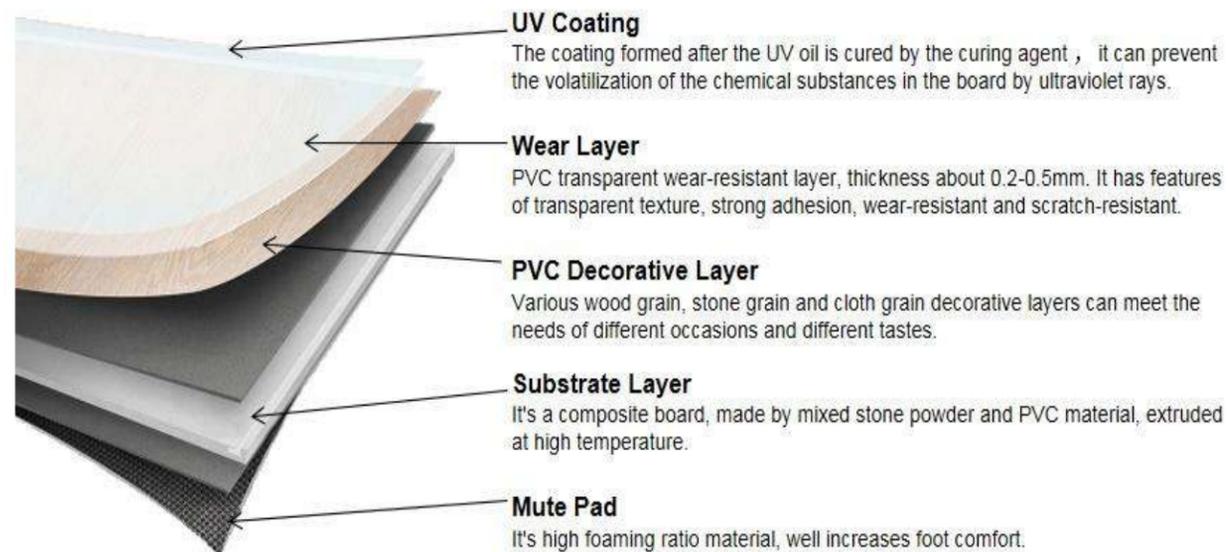

PRODUCT TYPE	SPC FLOORING
SIZE	1220*184MM
THICKNESS	4.0MM,5.0MM,6.0MM
ANTI-FRICTION LAYER	0.2MM,0.3MM,0.5MM
COLOR DESIGN	WOODERN COLOR
MATERIAL	SPC
MUTE PAD	IXPE:1MM/1.5MM
PACKING	4.0MM:24002800SQM/20'C 5.0MM:2000-2400SQM/20'C
INSTALLATION	INTERLOCKING /CLICK
APPLICATION	INTERIOR FLOORING DECORATION



# SCENE DISPLAY



337-1



337-3



337-2





**Company : Sealpoint**

**Contact number : 0455797733**

**Email address : [info@sealpoint.com.au](mailto:info@sealpoint.com.au)**